



AquaCulture

Overview


AquaCulture

DESMI
Make life flow

High Flow - Low Pressure Pumps for Aquaculture



Service friendly “Back Pull-out”

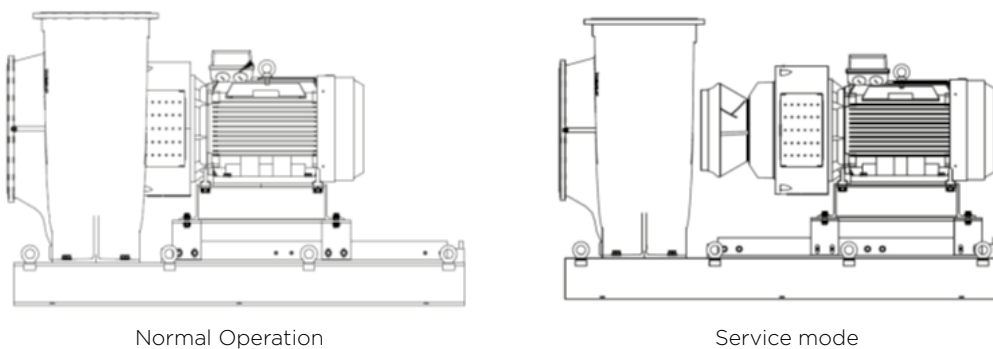

Design Flexibility

Pressure Gauges

- Valves with air blending and shutoff
- Glycerin filled gauges Ø63 or Ø100
- Possibility to add extra "T" for pressure transmitter

Motor

- DESMI Standard or any motor preference is possible
- PTE Thermistor, IP56, PT100 (windings/bearings) anti-condensation heaters, current insulated bearings, SPM Nipples, external ventilation, etc.

Optional customer colour selection with different corrosion specifications


- Any colour is possible if the RAL-code is given
- C3-M, C4-M, C5-M, etc.



Plain Design



Valve Design

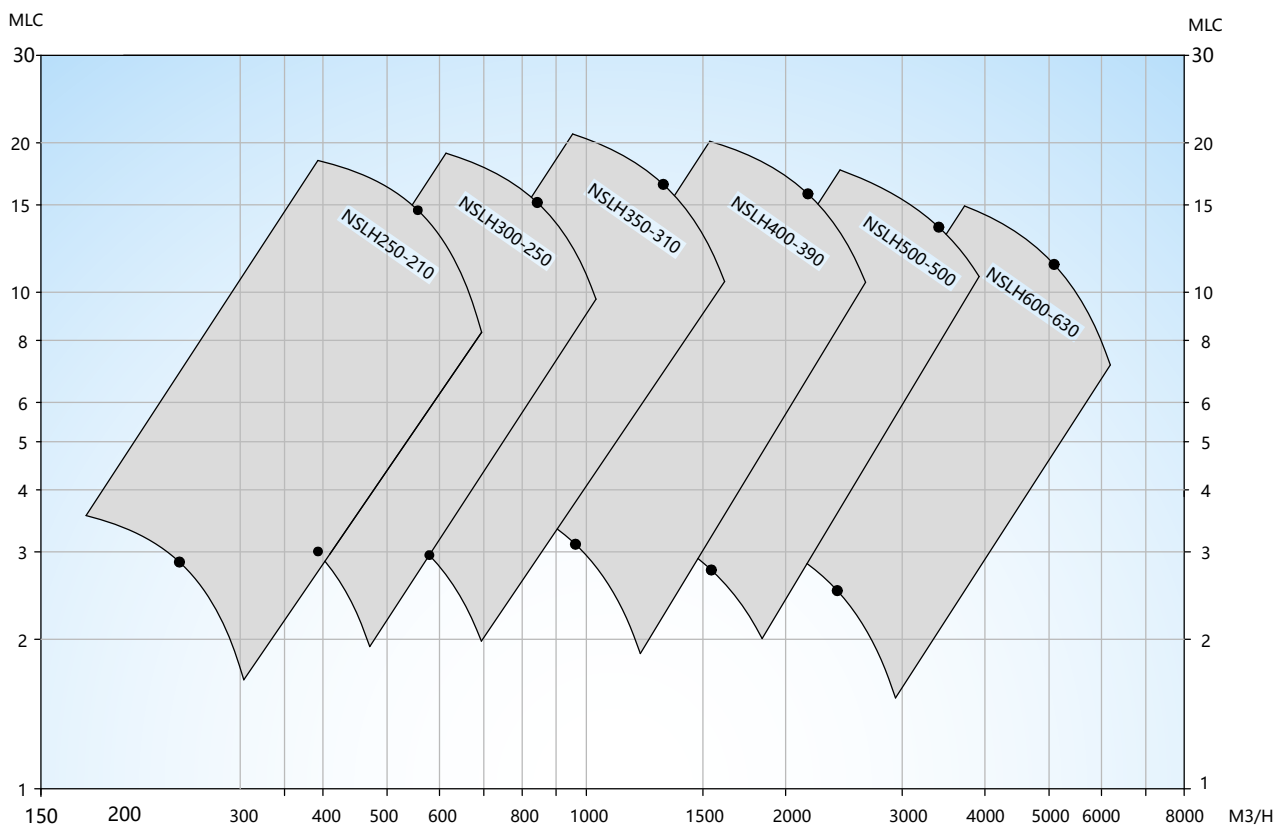

• MAX EFFICIENCY POINT*

*shown for min. and max. speed for each pump size



NSLH250-210/AO2

Suction DN300 Velocity m/s	0,69	0,79	0,88	0,98	1,08	1,18	1,28	1,38	1,47	1,57	1,67	1,77	1,87	1,96
Discharge DN250 Velocity m/s	0,99	1,13	1,27	1,41	1,56	1,70	1,84	1,98	2,12	2,26	2,41	2,55	2,69	2,83
H mWC														
10														
9,5														
9														
8,5														
8														
7,5														
7														
6,5														
6														
5,5														
5														
4,5														
4														
3,5														
3														
2,5														
Q m³/h	175	200	225	250	275	300	325	350	375	400	425	450	475	500
Q l/s	49	56	63	69	76	83	90	97	104	111	118	125	132	139

						Optional Extras					
Nom. Effect	Nom. Motor Speed	Fresh-water	Salt-water <16°C	Salt water 16-35°C		Option Vertical execution	Option H180°	Option pull-back	Option C5-M paint if required for fresh-water	NiAlBz Impeller instead of 1.4410	Option IOT Cloud based monitoring
[kW]	[RPM]	*1	*2	*3		Add [€]	Add [€]	Add [€]	Add €	Deduct [€]	[€]
3	960		Ask DESMI								
4	960		Ask DESMI								
5,5	960		Ask DESMI								
7,5	1450		Ask DESMI								
11	1450		Ask DESMI								
15	1450		Ask DESMI								
18,5	1450		Ask DESMI								

End-Suction with bearing incl. Baseframe, Super Duplex Impeller, pressure gauges incl. Valve & T-Piece for customer added pressure transmitter. Standard DESMI IE3 Motor for 3 x 400 V / 50 Hz.

Spare Parts Kits are also available. Please contact DESMI on desmi@desmi.com or +45 9632 8111

***1** Fresh water execution
- Casing GG20 Cast Iron,
Shaft/impeller in super
duplex

***2** Salt water execution -
Casing = Ceramic coated
(Belzona) grey cast iron,
Shaft/impeller in super
duplex, C5-M

***3** High temperature salt
water execution as (*2)
plus high temperature
coating process, C5-M

***4** Pull back option
only available for
horizontal execution

Gatevalve (AquaCulture) - watertight from both sides incl. EDPM gasket
w. steel insert and bolts/washers/nuts in A4 for pump flange only




DN Pump PN 10	PE100 SDR26									Additional price for electrofusion joints for flange to pipe	
		AISI316		Duplex		AISI316		Duplex			
		ID	Price	ID	Price	ID	Price	ID	Price	ID	Price
250	315	ASK DESMI									
300	355	ASK DESMI									

PE Pipes (no fittings)

DN Pump	PE100SDR26					
	PE100 SDR26	Internal ØD	6m length		12m length	
			ID	Price	ID	Price
250	315	290,8	ASK DESMI		ASK DESMI	
300	355	327,8	ASK DESMI		ASK DESMI	

NB! Approx values only

Nom. Effect	Nom. Motor Speed	Nom. Current	Approx Weight	L	T
[kW]	[RPM]	[A]	[KG]	[MM]	[MM]
3	960	6,8	461	1008	390
4	960	9,0	470	1048	430
5,5	960	10,6	469	1048	430
7,5	1450	14,3	478	1048	430
11	1450	20,4	535	1163	545
15	1450	27,3	561	1163	545
18,5	1450	33,53	597	1208	590

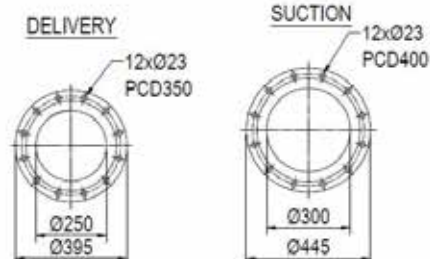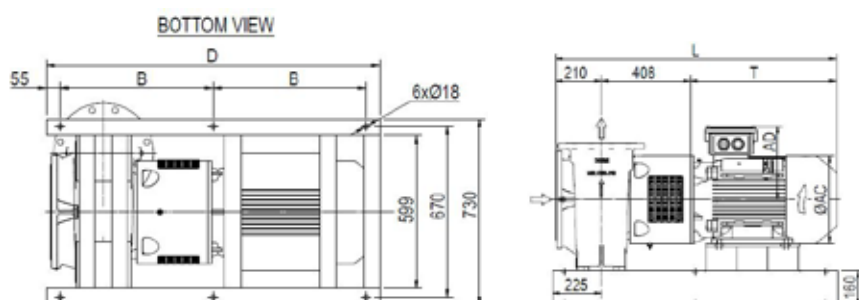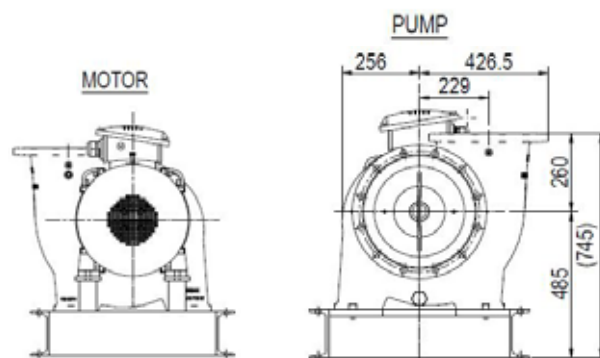



NSLH300-250/A02

Suction DN350 Velocity m/s	0,79	0,87	0,94	1,01	1,08	1,15	1,23	1,30	1,37	1,44	1,52	1,59	1,66	1,73	1,80	1,88	1,95
Discharge DN300 Velocity m/s	1,08	1,18	1,28	1,38	1,47	1,57	1,67	1,77	1,87	1,96	2,06	2,16	2,26	2,36	2,46	2,55	2,65
H mWC																	
10																	
9,5																	
9																	
8,5																	
8																	
7,5																	
7																	
6,5																	
6																	
5,5																	
5																	
4,5																	
4																	
3,5																	
3																	
2,5																	
Q m³/h	275	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650	675
Q l/s	76	83	90	97	104	111	118	125	132	139	146	153	160	167	174	181	188

						Optional Extras					
Nom. Effect	Nom. Motor Speed	Fresh-water	Salt-water <16°C	Salt water 16-35°C		Option Vertical execution	Option H180°	Option pull-back	Option C5-M paint if required for fresh-water	NiAlBz Impeller instead of 1.4410	Option IOT Cloud based monitoring
[kW]	[RPM]	*1	*2	*3		Add [€]	Add [€]	Add [€]	Add €	Deduct [€]	[€]
4	720		Ask DESMI								
7,5	960		Ask DESMI								
11	960		Ask DESMI								
15	1450		Ask DESMI								
18,5	1450		Ask DESMI								
22	1450		Ask DESMI								
30	1450		Ask DESMI								

End-Suction with bearing incl. Baseframe, Super Duplex Impeller, pressure gauges incl. Valve & T-Piece for customer added pressure transmitter. Standard DESMI IE3 Motor for 3 x 400 V / 50 Hz.

Spare Parts Kits are also available. Please contact DESMI on desmi@desmi.com or +45 9632 8111

- *1** Fresh water execution - Casing GG20 Cast Iron, Shaft/impeller in super duplex
- *2** Salt water execution - Casing = Ceramic coated (Belzona) grey cast iron, Shaft/impeller in super duplex, C5-M
- *3** High temperature salt water execution as (*2) plus high temperature coating process, C5-M
- *4** Pull back only available for NSLH & NSLH180°

Gatevalve (AquaCulture) - watertight from both sides incl. EDPM gasket
w. steel insert and bolts/washers/nuts in A4 for pump flange only






DN Pump PN 10	PE100 SDR26									Additional price for electrofusion joints for flange to pipe	
		Flange to flange		Flange to pipe							
		AISI316		Duplex		AISI316		Duplex			
		ID	Price	ID	Price	ID	Price	ID	Price	ID	Price
300	355	ASK DESMI									
350	400	ASK DESMI									

PE Pipes (no fittings)

DN Pump	PE100SDR26					
	PE100 SDR26	Internal ØD	6m length		12m length	
			ID	Price	ID	Price
300	355	327,8	ASK DESMI		ASK DESMI	
350	400	369,4	ASK DESMI		ASK DESMI	

NB! Approx values only

Nom. Effect	Nom. Motor Speed	Nom. Current	Approx Weight	L	T
[kW]	[RPM]	[A]	[KG]	[MM]	[MM]
4	720	9,3	526	1146	500
7,5	960	15,4	536	1146	500
11	960	22,0	562	1191	545
15	1450	27,3	572	1191	545
18,5	1450	36,0	662	1236	590
22	1450	42,5	682	1256	610
30	1450	56,0	736	1311	665

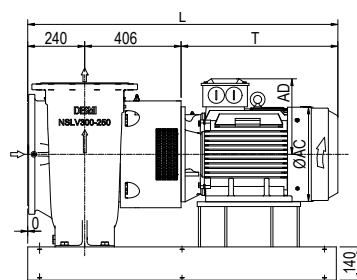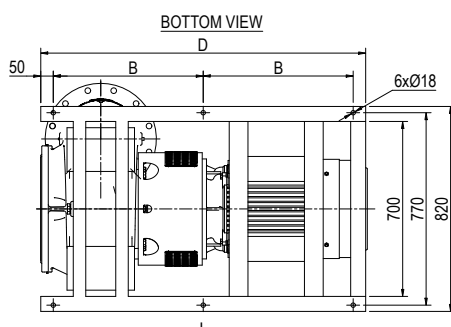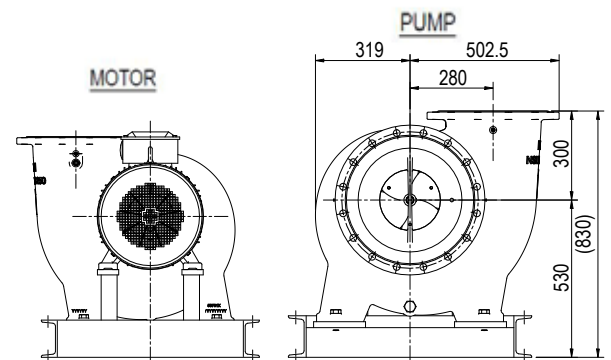



NSLH350-310/A02

Suction DN400 Velocity m/s	0,88	0,99	1,11	1,22	1,44	1,55	1,66	1,77	1,88	1,99	2,10	2,21	2,32	2,43	2,54
Discharge DN350 Velocity m/s	1,15	1,30	1,44	1,59	1,88	2,02	2,17	2,31	2,45	2,60	2,74	2,89	3,03	3,18	3,32
H mWC															
10															
9,5															
9															
8,5															
8															
7,5															
7															
6,5															
6															
5,5															
5															
4,5															
4															
3,5															
3															
2,5															
Q m³/h	400	450	500	550	650	700	750	800	850	900	950	1000	1050	1100	1150
Q l/s	111	125	139	153	181	194	208	222	236	250	264	278	292	306	319

						Optional Extras					
Nom. Effect	Nom. Motor Speed	Fresh-water	Salt-water <16°C	Salt water 16-35°C		Option Vertical execution	Option H180°	Option pull-back	Option C5-M paint if required for fresh-water	NiAlBz Impeller instead of 1.4410	Option IOT Cloud based monitoring
[kW]	[RPM]	*1	*2	*3		Add [€]	Add [€]	*4	Add €	Deduct [€]	[€]
		[€]	[€]	[€]							
5,5	720		Ask DESMI								
7,5	720		Ask DESMI								
11	720		Ask DESMI								
15	960		Ask DESMI								
18,5	960		Ask DESMI								
22	960		Ask DESMI								
30	960		Ask DESMI								
37	960		Ask DESMI								
45	1450		Ask DESMI								

End-Suction with bearing incl. Baseframe, Super Duplex Impeller, pressure gauges incl. Valve & T-Piece for customer added pressure transmitter.
Standard DESMI IE3 Motor for 3 x 400 V / 50 Hz.

Spare Parts Kits are also available. Please contact DESMI on desmi@desmi.com or +45 9632 8111

***1** Fresh water execution
- Casing GG20 Cast Iron,
Shaft/impeller in super
duplex

***2** Salt water execution -
Casing = Ceramic coated
(Belzona) grey cast iron,
Shaft/impeller in super
duplex, C5-M

***3** High temperature salt
water execution as (*2)
plus high temperature
coating process, C5-M

***4** Pull back only
available for NSLH
& NSLH180°

All prices should be considered budget prices for 2024 excl. VAT. Changes to the price, technical data might occur

Gatevalve (AquaCulture) - watertight from both sides incl. EDPM gasket
w. steel insert and bolts/washers/nuts in A4 for pump flange only






DN Pump PN 10	PE100 SDR26									Additional price for electrofusion joints for flange to pipe	
		AISI316		Duplex		AISI316		Duplex			
		ID	Price	ID	Price	ID	Price	ID	Price	ID	Price
		350	400	ASK DESMI							
400	450	ASK DESMI									

PE Pipes (no fittings)

DN Pump	PE100SDR26					
	PE100 SDR26	Internal ØD	6m length		12m length	
			ID	Price	ID	Price
350	400	369,4	ASK DESMI		ASK DESMI	
400	450	415,6	ASK DESMI		ASK DESMI	

NB! Approx values only

Nom. Effect	Nom. Motor Speed	Nom. Current	Approx Weight	L	T
[kW]	[RPM]	[A]	[KG]	[MM]	[MM]
5,5	720	12,5	768	1238	500
7,5	720	16,5	790	1283	545
11	720	22	792	1348	610
15	960	29,3	839	1348	610
18,5	960	36	888	1408	670
22	960	42,5	908	1408	670
30	960	56,2	962	1443	705
37	960	68,6	1055	1513	775
45	1450	80,2	992	1443	705

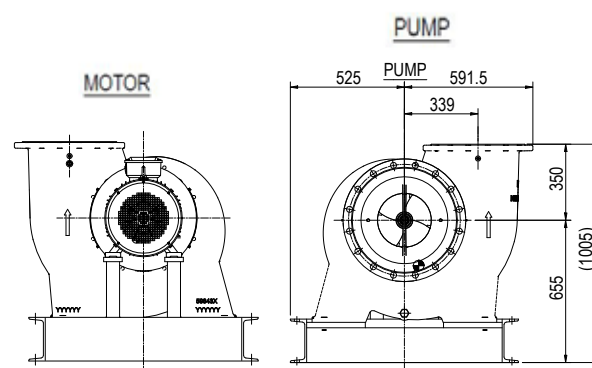

NSLH400-390/A02



Suction DN500 Velocity m/s	0,92	0,99	1,06	1,13	1,20	1,27	1,34	1,41	1,49	1,56	1,63	1,70	1,77	1,84	1,91	1,98	2,05	2,12	2,19	2,26	2,41	2,48	2,55	2,62
Discharge DN400 Velocity m/s	1,44	1,55	1,66	1,77	1,88	1,99	2,10	2,21	2,32	2,43	2,54	2,65	2,76	2,87	2,98	3,09	3,21	3,32	3,43	3,54	3,76	3,87	3,98	4,09
H mWC																								
10																								
9,5																								
9																								
8,5																								
8																								
7,5																								
7																								
6,5																								
6																								
5,5																								
5																								
4,5																								
4																								
3,5																								
3																								
2,5																								
Q m³/h	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1700	1750	1800	1850
Q l/s	181	194	208	222	236	250	264	278	292	306	319	333	347	361	375	389	403	417	431	444	472	486	500	514

						Optional Extras					
Nom. Effect	Nom. Motor Speed	Fresh-water	Salt-water <16°C	Salt water 16-35°C		Option Vertical execution	Option H180°	Option pull-back	Option C5-M paint if required for fresh-water	NiAlBz Impeller instead of 1.4410	Option IOT Cloud based monitoring
[kW]	[RPM]	*1	*2	*3				*4			
[€]	[€]	[€]	[€]	[€]		Add [€]	Add [€]	Add [€]	Add €	Deduct [€]	[€]
15	720		Ask DESMI								
18,5	720		Ask DESMI								
22	720		Ask DESMI								
30	720		Ask DESMI								
37	960		Ask DESMI								
45*	960		Ask DESMI								
55*	960		Ask DESMI								
75**	960		Ask DESMI								

* incl. Insulated bearing in NDE

** IE4 incl. Insulated bearing in NDE

End-Suction with bearing incl. Baseframe, Super Duplex Impeller, pressure gauges incl. Valve & T-Piece for customer added pressure transmitter. Standard DESMI IE3 Motor for 3 x 400 V / 50 Hz.

Spare Parts Kits are also available. Please contact DESMI on desmi@desmi.com or +45 9632 8111

***1** Fresh water execution - Casing GG20 Cast Iron, Shaft/impeller in super duplex

***2** Salt water execution - Casing = Ceramic coated (Belzona) grey cast iron, Shaft/impeller in super duplex, C5-M

***3** High temperature salt water execution as (*2) plus high temperature coating process, C5-M

***4** Pull back only available for NSLH & NSLH180°

All prices should be considered budget prices for 2024 excl. VAT. Changes to the price, technical data might occur

Gatevalve (AquaCulture) - watertight from both sides incl. EDPM gasket
w. steel insert and bolts/washers/nuts in A4 for pump flange only




DN Pump PN 10	PE100 SDR26									Additional price for electrofusion joints for flange to pipe	
		AISI316		Duplex		AISI316		Duplex			
		ID	Price	ID	Price	ID	Price	ID	Price	ID	Price
400	450	ASK DESMI									
500	560	ASK DESMI									

PE Pipes (no fittings)


DN Pump	PE100SDR26					
	PE100 SDR26	Internal ØD	6m length		12m length	
			ID	Price	ID	Price
400	450	415,6	ASK DESMI		ASK DESMI	
500	560	517,2	ASK DESMI		ASK DESMI	

NB! Approx values only


Nom. Effect	Nom. Motor Speed	Nom. Current	Approx Weight	L	T
[kW]	[RPM]	[A]	[KG]	[MM]	[MM]
15	720	31,8	1171	1447	665
18,5	720	39	1220	1462	680
22	720	44,9	1242	1487	705
30	720	60	1319	1557	775
37	960	68,6	1332	1557	775
45*	960	81,6	1490	1657	875
55*	960	98,1	1560	1707	925
75**	960	136,2	1785	1802	1020

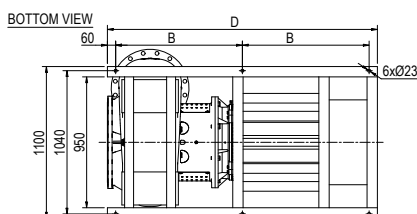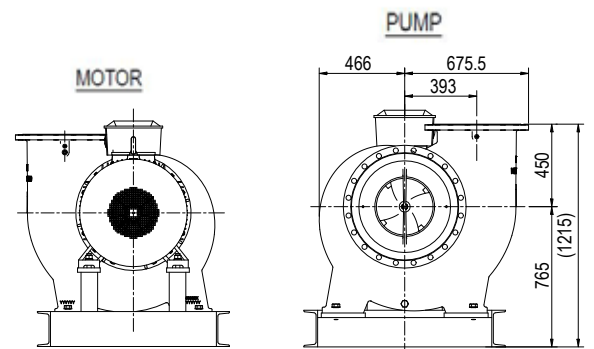

DELIVERY



SUCTION





NSLH500-500/A02

Suction DN600 Velocity m/s	0,98	1,08	1,18	1,28	1,38	1,47	1,57	1,67	1,77	1,87	1,96	2,06	2,16	2,26	2,36	2,46	2,55	2,65	2,75	2,85	2,95	3,05	3,14	3,24	3,34	3,44
Discharge DN500 Velocity m/s	1,41	1,56	1,70	1,84	1,98	2,12	2,26	2,41	2,55	2,69	2,83	2,97	3,11	3,25	3,40	3,54	3,68	3,82	3,96	4,10	4,24	4,39	4,53	4,67	4,81	4,95
H mWC																										
10																										
9,5																										
9																										
8,5																										
8																										
7,5																										
7																										
6,5																										
6																										
5,5																										
5																										
4,5																										
4																										
3,5																										
3																										
2,5																										
Q m³/h	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000	3100	3200	3300	3400	3500
Q l/s	278	306	333	361	389	417	444	472	500	528	556	583	611	639	667	694	722	750	778	806	833	861	889	917	944	972

						Optional Extras					
Nom. Effect	Nom. Motor Speed	Fresh-water	Salt-water <16°C	Salt water 16-35°C		Option Vertical execution	Option H180°	Option pull-back	Option C5-M paint if required for fresh-water	NiAlBz Impeller instead of 1.4410	Option IOT Cloud based monitoring
[kW]	[RPM]	*1	*2	*3		Add [€]	Add [€]	*4	Add €	Deduct [€]	[€]
37	720		Ask DESMI								
45*	720		Ask DESMI								
55*	720		Ask DESMI								
75*	720		Ask DESMI								
90*	720		Ask DESMI								
110*	720		Ask DESMI								
132*	720		Ask DESMI								

* incl. Insulated bearing in NDE

End-Suction with bearing incl. Baseframe, Super Duplex Impeller, pressure gauges incl. Valve & T-Piece for customer added pressure transmitter. Standard DESMI IE3 Motor for 3 x 400 V / 50 Hz.

Spare Parts Kits are also available. Please contact DESMI on desmi@desmi.com or +45 9632 8111

***1** Fresh water execution - Casing GG20 Cast Iron, Shaft/impeller in super duplex

***2** Salt water execution - Casing = Ceramic coated (Belzona) grey cast iron, Shaft/impeller in super duplex, C5-M

***3** High temperature salt water execution as (*2) plus high temperature coating process, C5-M

***4** Pull back only available for NSLH & NSLH180°

All prices should be considered budget prices for 2024 excl. VAT. Changes to the price, technical data might occur

Gatevalve (AquaCulture) - watertight from both sides incl. EDPM gasket
w. steel insert and bolts/washers/nuts in A4 for pump flange only



DN Pump PN 10	PE100 SDR26									Additional price for electrofusion joints for flange to pipe	
		AISI316		Duplex		AISI316		Duplex			
		ID	Price	ID	Price	ID	Price	ID	Price	ID	Price
		500	560	ASK DESMI							
600	630	ASK DESMI									

PE Pipes (no fittings)

DN Pump	PE100SDR26					
	PE100 SDR26	Internal ØD	6m length		12m length	
			ID	Price	ID	Price
500	560	517,2	ASK DESMI		ASK DESMI	
600	630	581,8	ASK DESMI		ASK DESMI	

NB! Approx values only

Nom. Effect	Nom. Motor Speed	Nom. Current	Approx Weight	L	T
[kW]	[RPM]	[A]	[KG]	[MM]	[MM]
37	720	73,6	1960	1818	875
45*	720	89,2	2040	1868	925
55*	720	106	2472	1963	1020
75*	720	143,6	2548	2098	1155
90*	720	169,6	2638	2098	1155
110*	720	206,7	2727	2098	1155
132*	720	247,2	3392	2278	1335

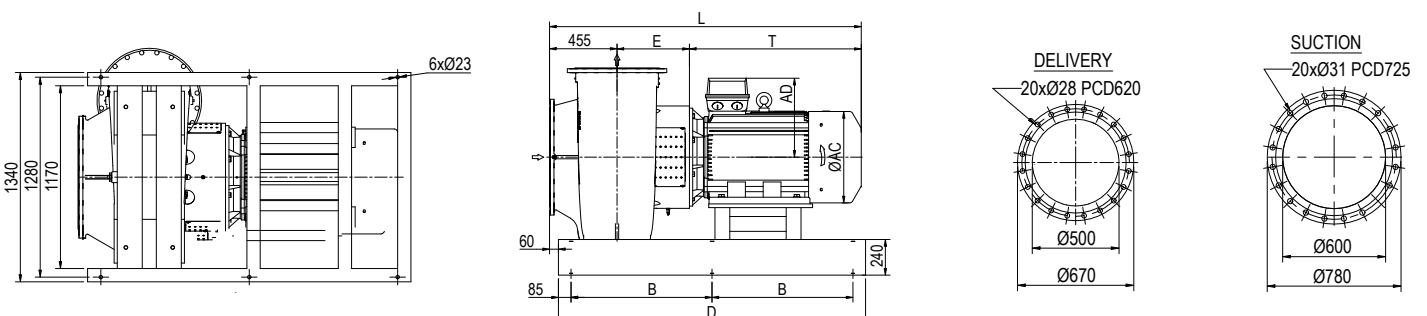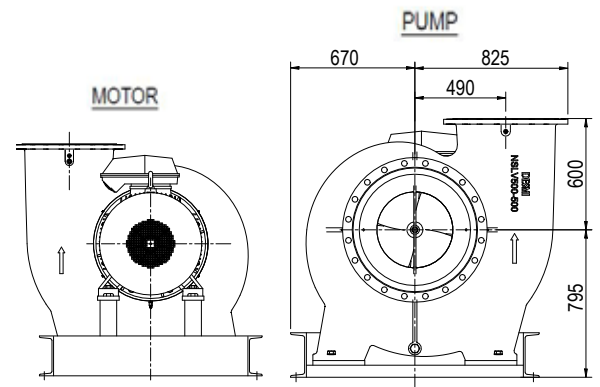



NSLH600-630/A02

Suction DN600 Velocity m/s	2,36	2,55	2,75	2,95	3,14	3,34	3,54	3,73	3,93	4,13	4,32	4,52	4,72	4,91	5,11	5,31	5,50	5,70
Discharge DN600 Velocity m/s	2,36	2,55	2,75	2,95	3,14	3,34	3,54	3,73	3,93	4,13	4,32	4,52	4,72	4,91	5,11	5,31	5,50	5,70
H mWC																		
10																		
9,5																		
9																		
8,5																		
8																		
7,5																		
7																		
6,5																		
6																		
5,5																		
5																		
4,5																		
4																		
3,5																		
3																		
2,5																		
2																		
Q m³/h	2400	2600	2800	3000	3200	3400	3600	3800	4000	4200	4400	4600	4800	5000	5200	5400	5600	5800
Q l/s	667	722	778	833	889	944	1000	1056	1111	1167	1222	1278	1333	1389	1444	1500	1556	1611

						Optional Extras					
Nom. Effect	Nom. Motor Speed	Fresh-water	Salt-water <16°C	Salt water 16-35°C		Option Vertical execution	Option H180°	Option pull-back	Option C5-M paint if required for fresh-water	NiAlBz Impeller instead of 1.4410	Option IOT Cloud based monitoring
[kW]	[RPM]	*1	*2	*3		Add [€]	Add [€]	*4	Add €	Deduct [€]	[€]
55*	720		Ask DESMI								
75*	720		Ask DESMI								
90*	720		Ask DESMI								
110*	720		Ask DESMI								
132*	720		Ask DESMI								
160*	720		Ask DESMI								
200*	720		Ask DESMI								

* incl. Insulated bearing in NDE

End-Suction with bearing incl. Baseframe, Super Duplex Impeller, pressure gauges incl. Valve & T-Piece for customer added pressure transmitter. Standard DESMI IE3 Motor for 3 x 400 V / 50 Hz.

Spare Parts Kits are also available. Please contact DESMI on desmi@desmi.com or +45 9632 8111

***1** Fresh water execution
- Casing GG20 Cast Iron,
Shaft/impeller in super
duplex

***2** Salt water execution -
Casing = Ceramic coated
(Belzona) grey cast iron,
Shaft/impeller in super
duplex, C5-M

***3** High temperature salt
water execution as (*2)
plus high temperature
coating process, C5-M

***4** Pull back only
available for NSLH
& NSLH180°

Gatevalve (AquaCulture) - watertight from both sides incl. EDPM gasket
w. steel insert and bolts/washers/nuts in A4 for pump flange only






DN Pump PN 10	PE100 SDR26									Additional price for electrofusion joints for flange to pipe	
		AISI316		Duplex		AISI316		Duplex			
		ID	Price	ID	Price	ID	Price	ID	Price	ID	Price
600	630	ASK DESMI									

PE Pipes (no fittings)


DN Pump	PE100SDR26					
	PE100 SDR26	Internal ØD	6m length		12m length	
			ID	Price	ID	Price
600	630	581,8	ASK DESMI		ASK DESMI	

NB! Approx values only

Nom. Effect	Nom. Motor Speed	Nom. Current	Approx Weight	L	T
[kW]	[RPM]	[A]	[KG]	[MM]	[MM]
55*	720	106	2756	1963	1020
75*	720	144	2832	2258	1155
90*	720	170	2922	2258	1155
110*	720	207	3011	2258	1155
132*	720	247	4388	2438	1335
160*	720	299	4478	2438	1335
200*	720	368	4628	2438	1335

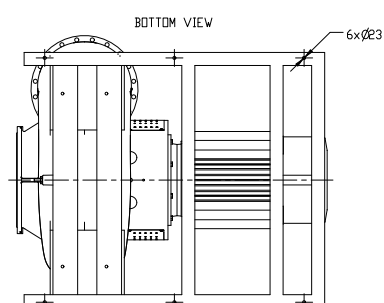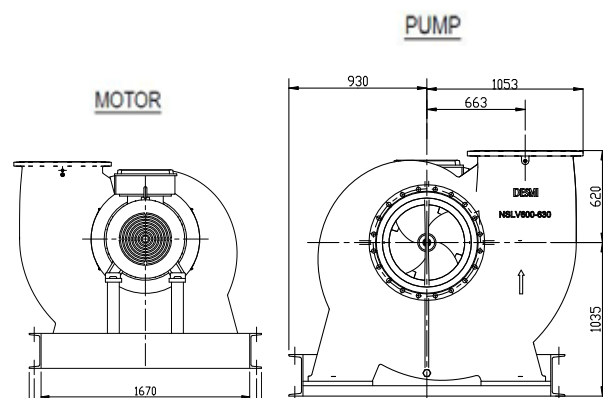

Ensuring Fish Health for Salmon Evolution

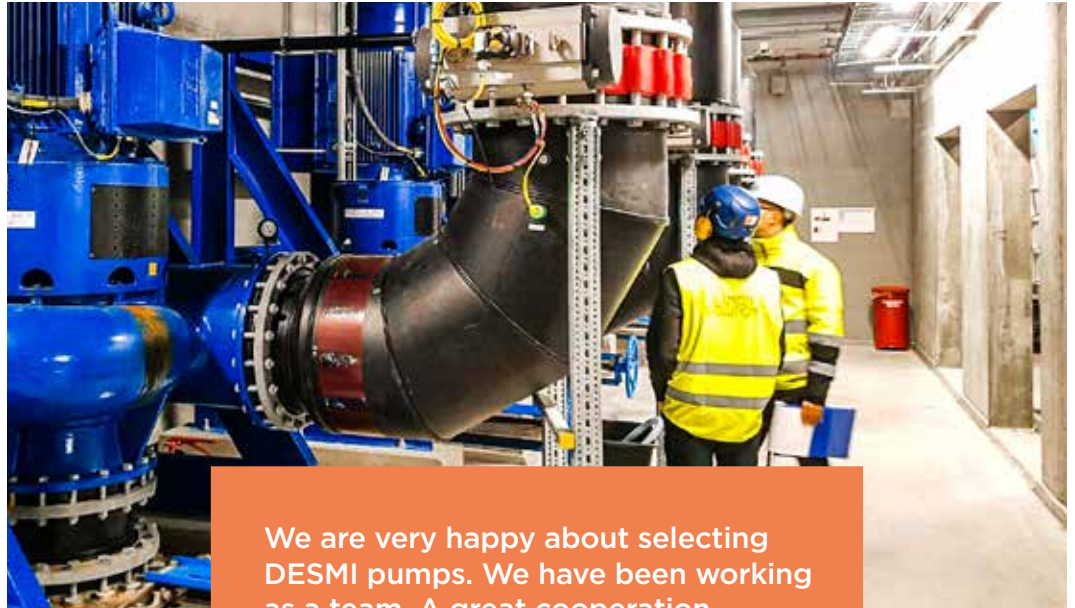

We are very happy about selecting DESMI pumps. We have been working as a team. A great cooperation.

Hallgeir Øyen
Technical Manager, Salmon Evolution, Norway



When Salmon Evolution were planning a new land-based HOG salmon plant, they knew they needed pumps that would last for many years, ensuring a safe and healthy environment for the fish.

The Norwegian company selected DESMI based on our reliable, high-quality, and energy-efficient pumps and competitive pricing, and our proven excellent service and aftermarket support. Technical Manager Hallgeir Øyen praised the combination of reliable products and great support.

“The DESMI team was professional and supportive, providing efficient and effective solutions for the customer’s needs,” he said.



Location

Indre Harøy, Norway



Application

Land-based plant for HOG salmon



DESMI products

110 centrifugal pumps plus service and aftermarket support

Optimal Environment at Sashimi Royal



We have obtained pumps capable of handling the capacities we expect and a skilled partner we hope to work with for many years.

Mikkel K. Thomsen
CEO, Nordic Aquafarms Technology ApS, Denmark



SASHIMI ROYAL
SUSTAINABLE AQUACULTURE

In a 24-tank production hall, Sashimi Royal cultivate yellowtail kingfish in ideal aquaculture conditions in Hanstholm, Denmark. DESMI pumps are playing a key role in ensuring a perfect environment for the fish.

The pumps include NSLH centrifugal pumps with a back pull-out design which enables easy maintenance without needing to alter or remove pipes or couplings. CEO Mikkel K. Thomsen of Nordic Aquafarms who designed and built the facility is happy with the solution, and with DESMI's contributions.

“DESMI has always shown great openness and willingness to provide the right and best pumps,” he said.



Location

Hanstholm, Denmark



Application


Land-based plant for yellowtail kingfish




DESMI products

30+ pumps including NSLH models with back pull-out design

Monitoring Pump Data

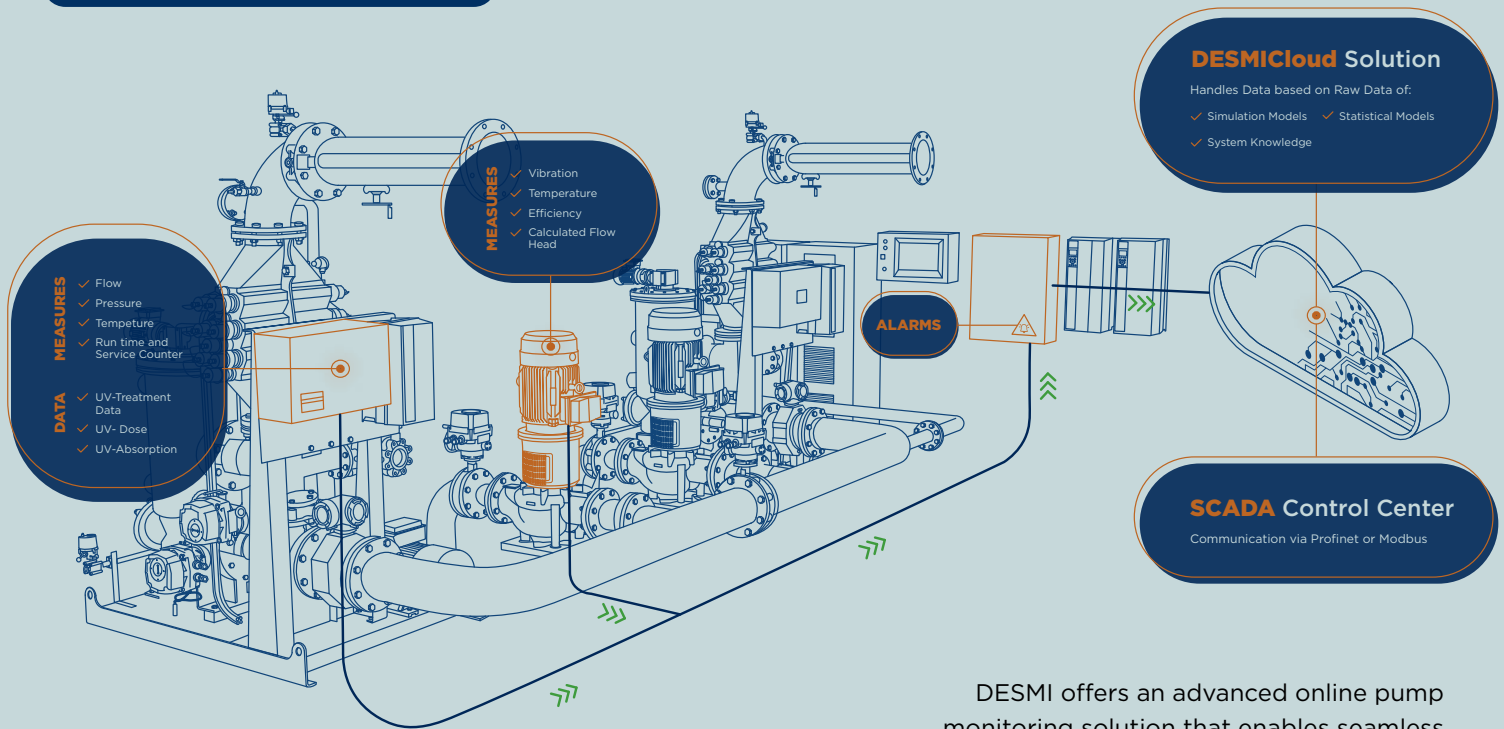

DESMI offers an advanced online pump monitoring solution that enables seamless surveillance of crucial sensor-based pump parameters. This includes monitoring pump pressure at both the inlet and discharge flanges, flow rate, vibration levels, media temperature, motor temperature, and various other critical metrics.

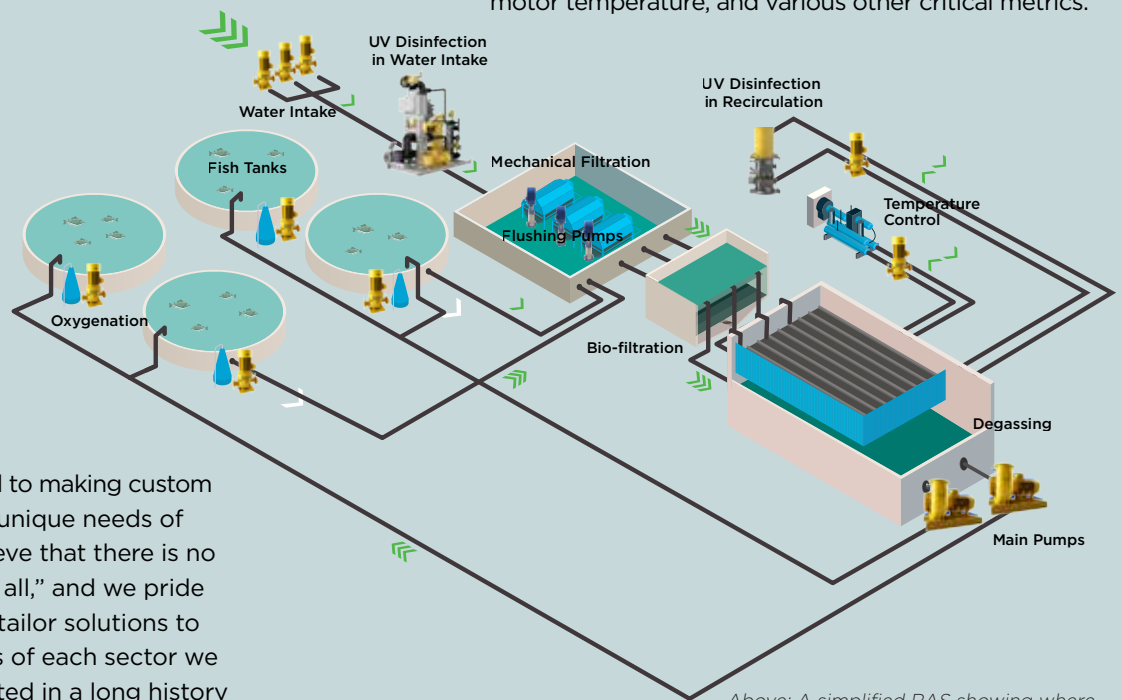

At DESMI, we are committed to making custom solutions that cater to the unique needs of various industries. We believe that there is no such thing as “one size fits all,” and we pride ourselves on our ability to tailor solutions to meet the specific demands of each sector we serve. Our approach is rooted in a long history of engineering excellence and a relentless pursuit of customer satisfaction.

Above: A simplified RAS showing where DESMI pumps and solutions can be used

Find more
solutions on
desmi.com

Call the
DESMI Service Hotline
round the clock
at +45 96 32 81 10

After-sales and service

from DESMI DeServe



Call us anytime and let us know what you need: Our global after-sales and service department DESMI DeServe offers parts and services that keep your aquaculture operation running.

Our spare part kits cover several pumps and contain the parts you need for overhauls, for example shaft seals, bearings, and O-rings. You can also order individual spare parts as needed, and for some parts or products, we ship within 48 hours.

Our highly experienced and factory trained service teams provide a long list of onsite services, from installation and commissioning to service, repair, upgrades, and maintenance, plus training and technical support – whatever it takes to optimize your critical flow processes.



Overhaul
Videos



We exist to keep your business flowing

DESMI works closely with aquaculture engineers, designers, and owners to keep critical production processes flowing reliably and efficiently on fish farms on land and at sea, anywhere on the planet. Our pumps, UV treatment systems, IoT offerings, and after-sales service are trusted worldwide for dependability and the lowest total cost of ownership.

At DESMI, our focus has never been on discovering what we can do – it's about pushing the boundaries of what we can do for you, no matter which type of facility and what species you work with. We help you ensure optimal production environments that keep fish stocks healthy and safe and keep your business profitable.

Founded in Denmark in 1834, we have provided the expertise, solutions, and aftermarket support our customers need for nearly two centuries. We help you operate more efficiently and reliably, enabling your ambitions for performance, food safety, and growth whilst helping you reduce your climate impact.

Together, we can make a difference, whatever the future holds. Because we, like you, are here to **make life flow**.

For more information, visit desmi.com

DESMI A/S

Tagholm 1
DK-9400 Nørresundby
Tel.: +45 96 32 81 11