



DESMI BWMS Fast Track

Fast Delivery of Ballast Water Management Systems

PROVEN TECHNOLOGY

DESMI


FAST COMPLIANCE

Are you in urgent need of a ballast water management system that can be installed easily and quickly? DESMI Ocean Guard supplies a selection of loose components and skid mounted ballast water management systems within four working weeks (one month).

You get a fully compliant system that is easy to install. The system is fully automatic and can be completely integrated into your ship's automation system.

No matter which system you choose, you are guaranteed a system with IMO and USCG type approval and the following benefits:

- The smallest footprint in industry
- Only system in the world with integrated stripping solution
- Filter and UV unit in seawater resistant Nickel-Alu-Bronze
- Two hours' holding time on USCG TA certificate
- No salinity or temperature limitations
- 100% chemical free treatment

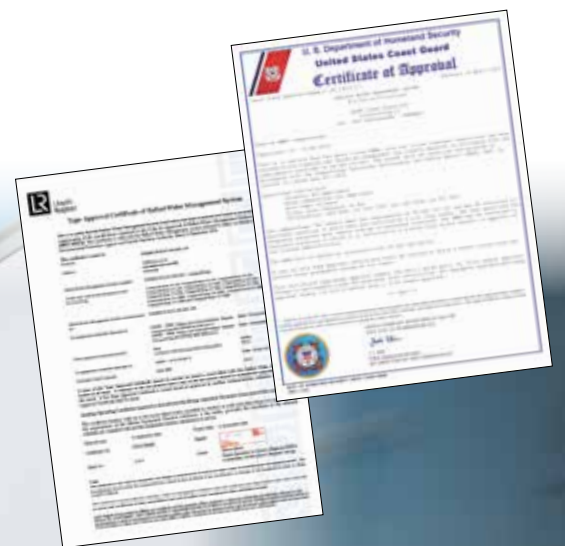

Big or Small - We have it Available



DESMI Ocean Guard supplies a selection of loose components and skid mounted ballast water management systems within four working weeks (one month).

The terms of delivery are simple - four weeks (or one month) ex works Noerresundby, Denmark.

All you have to do, is to tell us the delivery address and whether you will install the system yourselves or we are to help you.

Our skilled service engineers are ready to assist you. It is as easy as plug and play - and you get an outstanding performance.

The colour-marked systems can be delivered on fast track within four working weeks (or one month)

Description	CC-135	CC-340	CC-500	CC-750	CC-1000	CC-1500	CC-2000	CC-2500	CC-3000
Loose components	x	x	x	x	x	x	x	x	x
Skid mounted	x	x	x	x	x	x			
Container solution	x	x	x	x	x				
Max. capacity	135 m ³ /h, 595 gpm	340 m ³ /h 1498 gpm	500 m ³ /h 2201 gpm	750 m ³ /h, 3302 gpm	1000 m ³ /h, 4403 gpm	1500 m ³ /h, 6604 gpm	2000 m ³ /h, 8806 gpm	2500 m ³ /h, 11007 gpm	3000 m ³ /h, 13209
Min. capacity ballast operation	25 m ³ /h, 110 gpm	45 m ³ /h, 198 gpm	50 m ³ /h 220 gpm	65 m ³ /h, 286 gpm	95 m ³ /h, 418 gpm	126 m ³ /h, 555 gpm	126 m ³ /h, 555 gpm	126 m ³ /h, 555 gpm	126 m ³ /h, 555 gpm
Min. capacity deballast and stripping operation	5 m ³ /h, 22 gpm	9 m ³ /h, 39 gpm	13 m ³ /h, 57 gpm	19 m ³ /h, 84 gpm	26 m ³ /h, 114 gpm	38 m ³ /h, 167 gpm	52 m ³ /h, 229 gpm	64 m ³ /h, 282 gpm	76 m ³ /h, 335 gpm
Installed power	36 kW	78 kW	93 kW	131 kW	169 kW	245 kW	319 kW	395 kW	471 kW
Min. power	6 kW	11.5 kW	16.5 kW	24.6 kW	32 kW	48 kW	64 kW	80 kW	96 kW
Typical average power consumption	13 kW	25 kW	37 kW	55 kW	73 kW	109 kW	146 kW	182 kW	218 kW
Footprint (L x W x H)	1595x1125 x2035 mm, 63x44x80 in - 1.8 m ² , 19.3 sqft	1602 x 1232 x 2392 mm, 63x48x94 in - 2.0 m ² 21.5 sq ft	1807 x 1295 x 2614 mm, 71x51x103 in - 2.4 m ² 25.8 sq ft	2072 x 1364 x 3115 mm, 82x54x123 in - 2.9 m ² 31.2 sq ft	2067 x 1469 x 3389 mm, 81x58x133 in - 3.0 m ² 32.3 sq ft	2419 x 1557 x 3746 mm, 95x61x147 in - 3.8 m ² 40.9 sq ft	- - 6.0 m ² , 64.6 sq ft	- - 7.3 m ² , 78.6 sq ft	- - 7.5 m ² , 80.7 sq ft
Electrical Panel* (W x L x H)	600 x 600 x 1,806 mm, 24x24x71 in	600 x 600 x 1,806 mm, 24x24x71 in	600 x 700 x 2208 mm 24x28x87 in	600 x 1200 x 1803 mm, 24x47x71 in	700 x 1200 x 2208 mm, 28x47x87 in	700 x 1200 x 2208 mm, 28x47x87 in	-	-	-
*Two (2) Electrical Panel for CC-2000, 2500 & 3000	- 0.36 m ² 3.9 sqft	- 0.36 m ² 3.9 sqft	- 0.42 m ² 4.5 sqft	- 0.72 m ² 7.8 sqft	- 0.84 m ² 9.0 sqft	- 0.84 m ² 9.0 sqft	- 2 x 0.84 m ² , 2 x 9.0 sq ft	- 2 x 0.84 m ² , 2 x 9.0 sq ft	- 2 x 0.84 m ² , 2 x 9.0 sq ft
Backflush/ stripping pump capacity	7 - 25 m ³ /h	45 - 90 m ³ /h	45 - 90 m ³ /h	45 - 90 m ³ /h	90 - 130 m ³ /h	90 - 130 m ³ /h			

Your DESMI Ocean Guard Contact for Ballast Water Management Systems

DESMI offices:

Africa

DESMI Africa Ltd.
Tel.: +255 222 600014

Canada

DESMI Inc.
Tel.: +1 905 321 3471

China

DESMI Pumping Technology (Suzhou) Co., Ltd.
Tel.: +86 512 6274 0400

DESMI Pumping Technology (Suzhou) Co., Ltd.
Shanghai Liaison Office
Tel.: +86 21 6071 06 00-05, 6071 06 07-13

DESMI Pumping Technology (Suzhou) Co., Ltd.
Tianjin Liaison Office
Tel.: +86 22 2317 0467

DESMI Pumping Technology (Suzhou) Co., Ltd.
Guangzhou Liaison Office
Tel.: +86 20 2831 3973

DESMI Pumping Technology (Suzhou) Co., Ltd.
Chongqing Liaison Office
Tel.: +86 23 8823 3518

DESMI Pumping Technology (Xuancheng)
Co., Ltd.
Tel.: +86 563 2612 570

Denmark

DESMI A/S - Group Head Quarter
Tagholm 1
DK-9400 Nørresundby
Tel.: +45 96 32 81 11

DESMI Pumping Technology A/S
Tel.: +45 96 32 81 11

DESMI Danmark A/S
Tel.: +45 72 44 02 50

DESMI Contracting A/S
Tel.: +45 96 32 81 11

DESMI Ro-Clean A/S
Tel.: +45 65 48 16 10

DESMI Ocean Guard A/S
Tel.: +45 96 32 81 99

Ecuador

DESMI Latinoamerica S.A.
Tel.: +593 2 326 1939

France

DESMI SARL
Tel.: +33 130 439 710

Germany

DESMI GmbH
Tel.: +49 407 519847

Greece

DESMI Greece
Tel.: +30 2114 111 893

India

DESMI India LLP
Toll Free Number: 1800 123 123 001

Indonesia

DESMI Ro-Clean APAC
Tel.: +62 21 23585636

Korea

DESMI Korea
Tel.: +82 51 723 8801

Netherlands

DESMI B.V.
Tel.: +31 30 261 00 24

Norway

DESMI Norge AS
Tel.: +47 38 12 21 80

Poland

DESMI Sp. z o.o.
Tel.: +48 22 676 91 16

Singapore

DESMI Singapore Pte Ltd.
Tel.: +65 62 50 71 77

Sweden

DESMI Sweden
Tel.: +46 31 304 51 30

UAE

DESMI Pumping Technology A/S (Br.)
Dubai Office
Tel.: +971 4 501 5530

Abu Dhabi Office
Tel.: +971 50-821 4979

U.K.

DESMI Ltd.
Tel.: +44 1782 566900

DESMI FHS Ltd.
Tel.: +44 1782 566900

USA

DESMI Inc.
Tel.: +1 757 857 7041

- DESMI Companies
- DESMI Dealers/Agents

Need more information or specifications? Contact us on info@desmioceanguard.com or read more about DESMI and DESMI's other products and solutions on www.desmi.com or www.desmioceanguard.com

MARINE & OFFSHORE

INDUSTRY

ENVIRO-CLEAN

DEFENCE & FUEL

UTILITY