


NSA

Close coupled self-priming centrifugal pumps

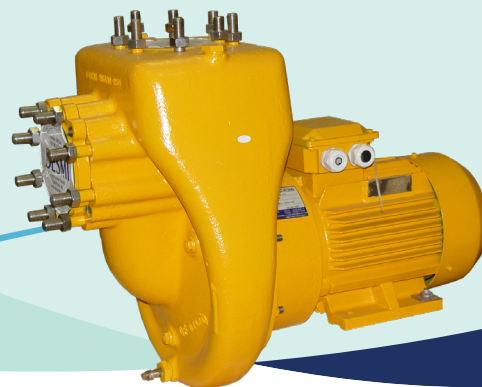




Design

Open impeller, exchangeable wear plate, standard stainless steel shaft and nonleaking mechanical shaft seal.

Applications, for example

- Bilge pump
- Ballast Pump
- General service pump
- Emergency fire pump
- Cooling water pump

Materials: Cast iron and bronze, materials are available.

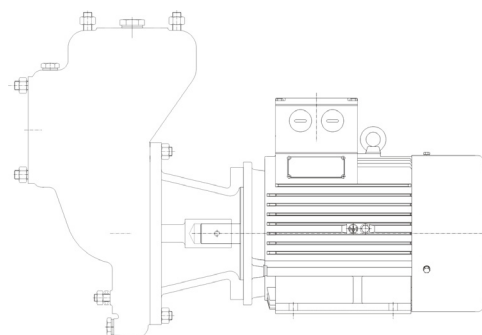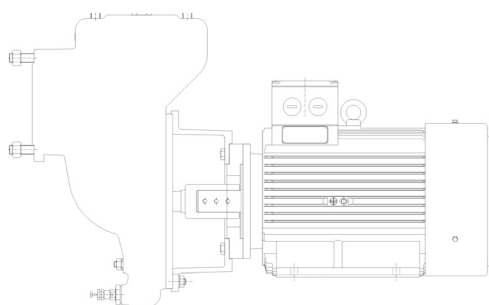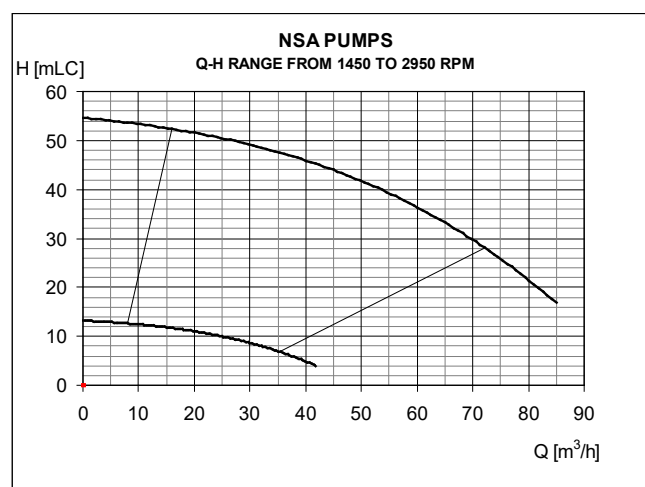

Technical Specifications:

Type	NSA 50-200
Pipe connections	2" suction/discharge
Capacity	10-50 m³/h
Total head	10-50 mWC
Suction head	8 mWC
Range	NSA 50-200 in close-coupled design with electric motor 4-5,5-7,5 kW at 2950 RPM.

Type	NSA 80-250
Pipe connections	3" suction/discharge
Capacity	10-85 m³/h
Total head	18-55 mWC
Suction head	7 mWC
Range	NSA 80-250 in close-coupled design with electric motor 4KW at 1450 RPM, and 11 kW at 2950 RPM.